


# Project Planning Sheet


## Linear Guideway PG

Company: \_\_\_\_\_

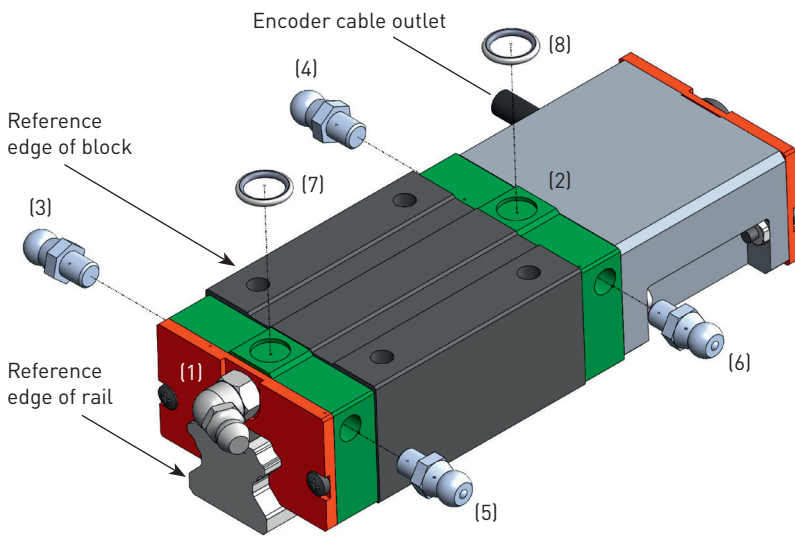

### Selection:

- Position of lubrication connection
  - Pos. 1, 2: frontside lubrication
  - Pos. 3, 4, 5, 6: side lubrication
  - Pos. 7, 8: lubrication from above
- Position of encoder cable outlet
- Standard (solid line)
- Optional (dashed line)

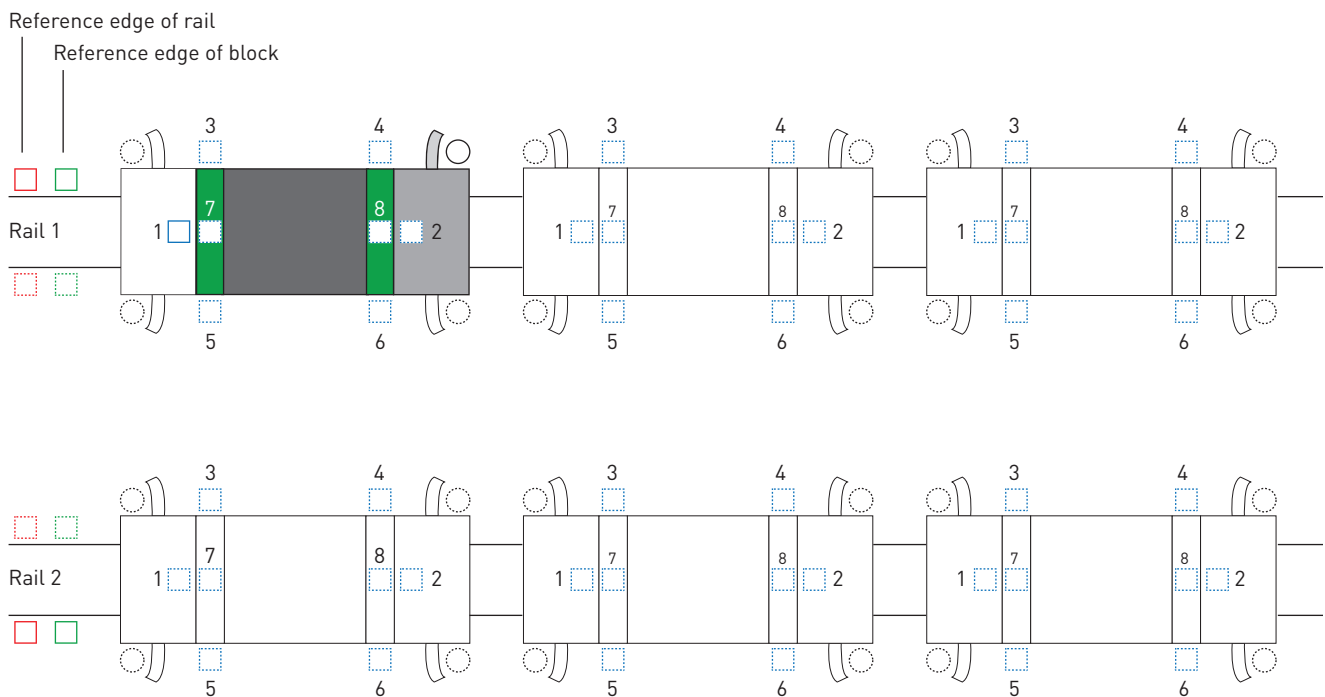

If the  $E_{1/2}$  dimensions are not indicated, the maximum possible number of mounting holes will be determined under consideration of  $E_{1/2}$  min and will be carried out symmetrically.

Without specifying, the following standard lubrication adapters will be used.

- Frontside lubrication (Pos. 1, 2):  $M6 \times 0.75 \times 67.5^\circ$
- Side lubrication (Pos. 3, 4, 5, 6):  $M6 \times 0.75 \times 0^\circ$

For multi-part rails please specify the section lengths of each rail and the required  $E_1$  and  $E_2$  values.